



We care about your samples

We care about your reagents

We care about your operating expenses

We care about the environment

We care about our quality

We care about all the details

We care about your satisfaction

We care about your success...



ULTRA BAJA TEMPERATURA -20° -40° / ULTRA LOW TEMPERATURE -20° -40°




* Pruebas realizadas con una temperatura ambiente de +25°C
* Measured at +25°C ambient temperature and

GAMA SERIES	Lab CARE	Lab CARE PLUS	Lab CARE PLUS
MODELO MODEL	LEUF60S (Static)	LTUF25S	LTUF40S
Rango T° Temperature range [°C]	-20 / -40	-20 / -40	-20 / -40
Capacidad Nominal (litros) Nominal Capacity [litres]	600	250	400
Medidas Exterior (mm) L x P x A Exterior dimensions (mm) W x D x H	750 x 772 x 1966	670 x 720 x 1538	670 x 720 x 1963
Medidas Interior (mm) L x P x1045 A Interior dimensions (mm) W x D x H	624 x 589 x 1594	520 x 484 x 913	520 x 484 x 1337
Claro de puerta (mm) L x A Door opening (mm) W x H	624 x 1557	568 x 855	568 x 1280
Espesor Aislamiento (mm) Insulation thickness (mm)	60	50	50
Acabado Exterior Exterior finishing	Acero Inoxidable Stainless steel	Acero galvanizado plastificado blanco White plastic coated galvanised steel	
Acabado Interior Interior finishing	Acero Inoxidable Stainless steel	Acero galvanizado plastificado blanco White plastic coated galvanised steel	
N° Estantes/Contenedores Shelves/Containers Number	6 / 13	4 Cajones / Drawers	7 Cajones / Drawers
Dimensiones Estantes (mm) L x P Shelf Size (mm) W x D	480 x 618	452 x 423	452 x 423
Material Estantes Shelves Material	Parrilla de alambre cromado Chrome-plated wire shelf	Acero galvanizado con pintura epoxi Epoxy coated galvanised steel	
Intercambiabilidad de Estantes/Cajones Interchangeable Shelves/Drawers	No	Si Yes	
Tipo de Puerta Door Type	Ciega Solid		
Cerradura Lock	Si Yes		
Salida USB USB Port	No	Si Yes	
Datalogger Datalogger	Opcional Optional	Si Yes	
Batería Battery	Opcional Optional	Si Yes	
Sonda simulación producto Product temperature simulation probe	No		
Sonda de temperatura ambiente Interior room temperature probe	Opcional Optional	Si Yes	
Tipo de Controlador Controller type	Digital	Digital Plus	
Tipo de Refrigerante Refrigerant type	R290		
Potencia Eléctrica (W) Electric power (W)	436	572	576
Tensión/Frecuencia (V / Hz) Voltage/Frequency (V / Hz)	230 / 50		
Peso (kg) Weight (kg)	130	132	159

Nos reservamos el derecho a modificar las especificaciones técnicas y constructivas sin previo aviso.
We reserve the right to modify technical and construction specifications without prior notice.




LEUF60S

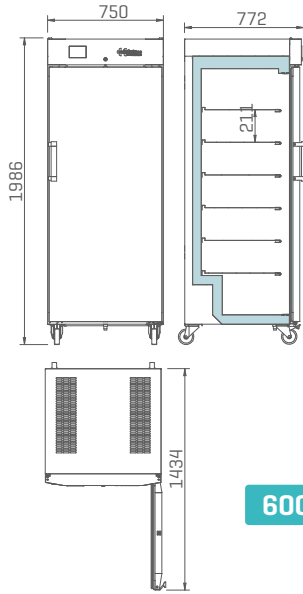

600 L




LTUF25S

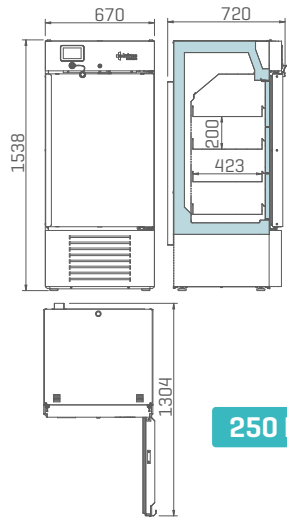

250 L



LTUF40S

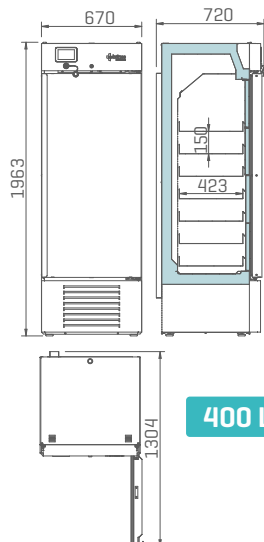

400 L

PHARMA
1
HEALTH
2
LAB
3
4
5
6
7
8



ULTRA BAJA TEMPERATURA -20° -40° / ULTRA LOW TEMPERATURE -20° -40°




* Pruebas realizadas con una temperatura ambiente de +25°C
* Measured at +25°C ambient temperature and

GAMA SERIES	Lab CARE PLUS	Lab CARE PLUS	Lab CARE PLUS	Lab CARE PLUS
MODELO MODEL	LTUF65S	LTUF80S	ULF50040	ULF70040
Rango T° Temperature range [°C]	-20 / -40	-20 / -40	-20 / -40	-20 / -40
Capacidad Nominal [litros] Nominal Capacity [litres]	650	800	500	700
Medidas Exterior [mm] L x P x A Exterior dimensions [mm] W x D x H	687 x 855 x 1955	757 x 1037 x 1955	996 x 975 x 1997	1276 x 975 x 1997
Medidas Interior [mm] L x P x A Interior dimensions [mm] W x D x H	534 x 600 x 1207	645 x 768 x 1388	640 x 615 x 1167	920 x 578 x 1165
Claro de puerta [mm] L x A Door opening [mm] W x H	534 x 1350	645 x 1350	667 x 1297	946 x 1297
Espesor Aislamiento [mm] Insulation thickness [mm]	75		120	
Acabado Exterior Exterior finishing	Acero galvanizado plastificado blanco White plastic coated galvanised steel			
Acabado Interior Interior finishing	Acero Inoxidable Stainless steel			
N° Estantes/Cajones Shelves/Drawers Number	7	7	3	3
Dimensiones Estante/Cajón [mm] L x P Shelf/Drawer Size [mm] W x D	412 x 570	524 x 735	617 x 547	897 x 553
Material Estantes/Cajones Shelves/Drawers Material	Acero Inoxidable Stainless steel			
Intercambiabilidad de Estantes/Cajones Interchangeable Shelves/Drawers	Si Yes			
Tipo de Puerta Door Type	Ciega Solid			
Cerradura Lock	Si Yes			
Salida USB USB Port	Si Yes			
Datalogger Datalogger	Si Yes			
Batería Battery	Si Yes			
Sonda simulación producto Product temperature simulation probe	No			
Sonda de temperatura ambiente Interior room temperature probe	Si Yes			
Tipo de Controlador Controller type	Digital Plus			
Tipo de Refrigerante Refrigerant type	R290			
Potencia Eléctrica (W) Electric power [W]	745	745	1062	1098
Tensión/Frecuencia [V / Hz] Voltage/Frequency [V / Hz]	230 / 50			
Peso [kg] Weight [kg]	147	180	265	308

Nos reservamos el derecho a modificar las especificaciones técnicas y constructivas sin previo aviso.
We reserve the right to modify technical and construction specifications without prior notice.




LTUF65S

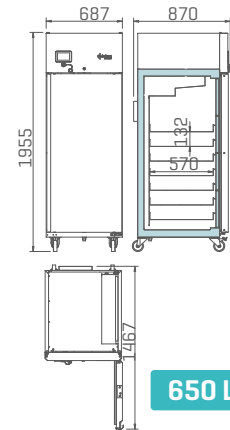

650 L




LTUF80S

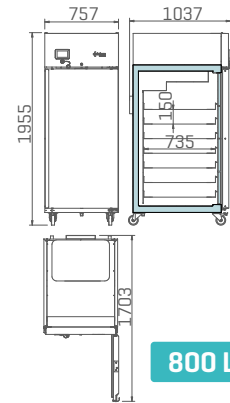

800 L




ULF50040

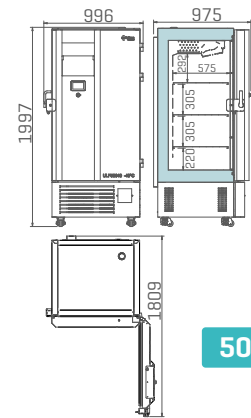

500 L



ULF70040

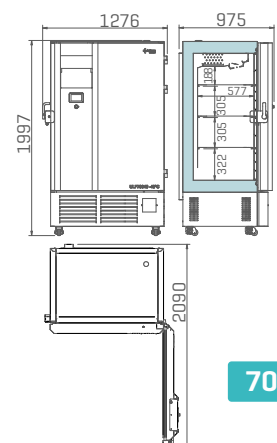

700 L

PHARMA

1

HEALTH

2

LAB

3

4

5

6

7

8